


**INDUSTRIAL COMPONENT DATA**

# WMS 4,8 (EX9)RL 0800321 PHOENIX CONTACT Shrink sleeve

Brand: PHOENIX CONTACT | Manufacturer Part Number: WMS 4,8 (EX9)RL

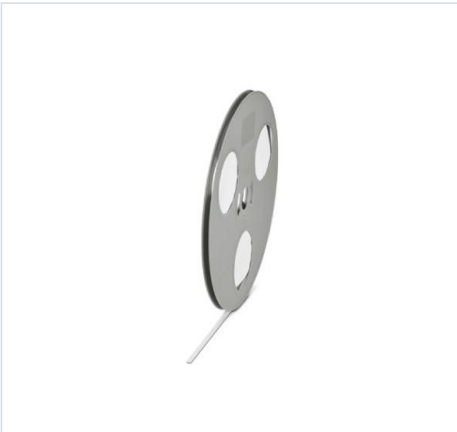

|                 |                     |
|-----------------|---------------------|
| Manufacturer    | PHOENIX CONTACT     |
| MPN / Reference | WMS 4,8 (EX9)RL     |
| Catalog number  | 0800321             |
| Category        | Cable coding system |
| Minimum order   | 1 Pcs               |
| Document ID     | EO-99462BEB4A       |
| Generated       | 2026-07-29          |

## Product Overview

**Shrink sleeve**

Heat-shrink tubing, Roll, white, unlabeled, labelable with: THERMOMARK E.SLEEVE, THERMOMARKE.300 (D)/600 (D), THERMOMARK ROLLMASTER 300/600, THERMOMARK ROLL X1, THERMOMARK ROLL, THERMOMARK ROLL 2.0, THERMOMARK W, THERMOMARK X1.2, undrilled, mounting class: slip, cable diameter range (automated processing): 1.6 ... 4.5 mm, cable diameter range: 1.6 ... 4.8 mm, usable area: 9x120000mm, length. Roll: 120 m

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                               |
|--------------|-------------------------------|
| Catalog path | PHOENIX CONTACT > MS Material |
|--------------|-------------------------------|

## Additional Product Information

**Key Commercial Data**

Orderkey 0800321

Packing unit 1 pc

Catalog page Page 234 (C-3-2017)

GTIN 4046356625913

Weight per Piece (excluding packing) 800.000 g

Custom tariff number 39173200

Country of origin CN (China)

**Dimensions**

Length (b) 120 m

Width (a) 9 mm

Cable diameter 1.6 mm ... 4.8 mm

Ambient conditions

Ambient temperature (operation) -55 °C ... 135 °C

General

Color white

Base element material polyolefine

Type Shrink sleeve

Components halogen-free

Material Polyolefine

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Printing without print

Marking mounting type slide on

Standards and Regulations

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Environmental Product Compliance

China RoHS For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Classifications

eCl@ss 4.0 24190219 eCl@ss 4.1 24190219 eCl@ss 5.0 27400401 eCl@ss 5.1 27400100 eCl@ss 6.0 27400100 eCl@ss 7.0 27400105 eCl@ss 8.0 27400105 eCl@ss 9.0 27400401

ETIM 2.0 EC000761 ETIM 3.0 EC001530 ETIM 4.0 EC000217 ETIM 5.0 EC000217 ETIM 6.0 EC001530

UNSPSC 6.01 30211811 UNSPSC 7.0901 39121410 UNSPSC 11 39121410 UNSPSC 12.01 39121410 UNSPSC 13.2 39131504

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / WMS 4,8 (EX9)RL with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.