


**INDUSTRIAL COMPONENT DATA**

# SK 5/3,8: L1-N,PE 0804206 PHOENIX CONTACT Marker card

Brand: PHOENIX CONTACT | Manufacturer Part Number: SK 5/3,8: L1-N,PE

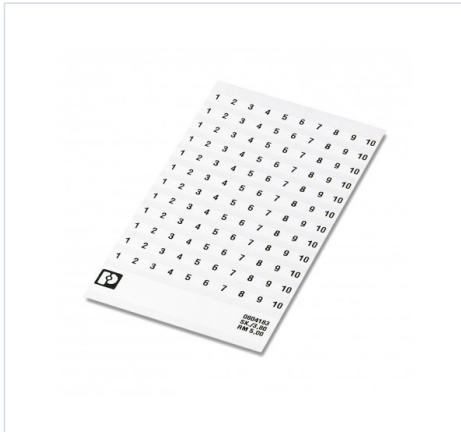

|                 |                              |
|-----------------|------------------------------|
| Manufacturer    | PHOENIX CONTACT              |
| MPN / Reference | SK 5/3,8: L1-N,PE            |
| Catalog number  | 0804206                      |
| Category        | Labelling for terminal block |
| Minimum order   | 10 Pcs                       |
| Document ID     | EO-3429C810E1                |
| Generated       | 2026-08-04                   |

## Product Overview

Marker card

Strip card, Elbow, white, labeled, longitudinal: L1, L2, L3, N, PE, mounting class: glued, for terminal width: 5 mm, Number of individual indexes: 12

Marker card, Sheet, white, labeled, horizontal: L1, L2, L3, N, PE, mounting type: adhesive, for terminal block width: 5 mm, Number of individual labels: 12, text field height: 3.8 mm, text field width: 5 mm

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                               |
|--------------|-------------------------------|
| Catalog path | PHOENIX CONTACT > MS Material |
|--------------|-------------------------------|

## Additional Product Information

Technical dataProduct propertiesProduct type Labeled terminal marker

Pitch 5 mm

Type adhesive

Data management status

Article revision 01

Marking

Number of individual labels 12

Number of marker strips 12

Printing direction horizontal

Printing L1, L2, L3, N, PE

MountingMounting type adhesive

Material specificationsFoil strength 53 µm

Adhesive strength 20 µm

Adhesive Acrylic

Color white

Material Polyester

Components free from silicone and halogen

Environmental and real-life conditions Test for substances that would hinder coating with paint or varnish

Result Test passed

UV resistance

Specification ISO 4892-2:2013-03 (following)

Result Test passed

Test duration 96 h

Wipe resistance of inscriptions

Specification DIN EN 61010-1 (VDE 0411-1):2011-07

DIN EN 62208 (VDE 0660-511):2012-06 (in parts)

Isopropyl

[CAS No. 67-63-0] Test passed

n-Hexane

[CAS No. 110-54-3] Test passed

Water + Petroleum ether

[CAS No. 64742-82-1] Test passed

Testing in a condensation changing climate in the presence of sulfur dioxide

Specification DIN 50018:2013-05

Result Test passed

Climate level AHT 1.0 S

Cycles 2

Salt spray test

Specification DIN EN 60068-2-11:2000-02

Result Test passed

Ambient conditions

Ambient temperature (operation) -40 °C ... 150 °C

Ambient temperature (assembly) > 15 °C

Recommended storage conditions 23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing.

Recommended ambient temperature (storage/transport) 23 °C

Recommended humidity (storage...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SK 5/3,8: L1-N,PE with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.