


**INDUSTRIAL COMPONENT DATA**

# UCT-PMP (90X38) VT CUS 8190707 PHOENIX CONTACT

## Snap-in markers

Brand: PHOENIX CONTACT | Manufacturer Part Number: UCT-PMP (90X38) VT CUS

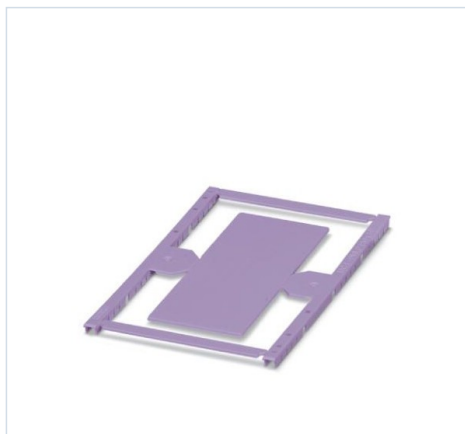

|                 |                              |
|-----------------|------------------------------|
| Manufacturer    | PHOENIX CONTACT              |
| MPN / Reference | UCT-PMP (90X38) VT CUS       |
| Catalog number  | 8190707                      |
| Category        | Labelling for terminal block |
| Minimum order   | 1 Pcs                        |
| Document ID     | EO-EF42B90C12                |
| Generated       | 2026-08-05                   |

### Product Overview

Snap-in markers

Fitting label, Mat, purple, labelled according to customer specifications, mounting type: fit on signage support, useful area: 90 x 38 mm, Number of individual indexes: 1

**STRUCTURED PRODUCT DATA**

### Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

### Classification & Catalog Path

|              |                                  |
|--------------|----------------------------------|
| Catalog path | PHOENIX CONTACT > CABINET add-on |
|--------------|----------------------------------|

### Additional Product Information

Key Commercial Data

Orderkey 8190707

Packing unit 1 pc

Note Made to Order (non-returnable)

Catalog page Page 287 (NTK-2014)

GTIN 4046356965699

Weight per Piece (excluding packing) 99.990 g

Custom tariff number 49119900

Country of origin DE (Germany)

Dimensions

Length (b) 38 mm

Width (a) 90 mm

Ambient conditions

Ambient temperature (operation) -25 °C ... 80 °C

Recommended storage conditions 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.

General

Color violet

Components free from silicone and halogen

Material PC

RoHS compliant Yes

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Number of individual labels 1

Number of individual labels per row 1

Printability Direct laser marking

Device 0831831 TOPMARK LASER

Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02

Result Test passed

Test specification weathering-resistance Following ISO 4892-2:2013-03

Test duration 96 h

Wipe resistance test result Test passed

Salt spray test specification DIN EN 60068-2-11:2000-02

Test duration 96 h

Salt spray testing result Test passed

Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07

Result Test passed

Marking mounting type snapped into marker carrier

Result Test passed

Oxygen index (DIN EN ISO 4589-2) 32.4 %

R22 HL 1 - HL 3

R23 HL 1 - HL 3

R24 HL 1 - HL 3

Standards and Regulations

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Fire protection for rail vehicles (DIN EN 45545-2)...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UCT-PMP (90X38) VT CUS with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.