


INDUSTRIAL COMPONENT DATA

UK 3-TWIN-PE 1923128 PHOENIX CONTACT Ground modular terminal block

Brand: PHOENIX CONTACT | Manufacturer Part Number: UK 3-TWIN-PE

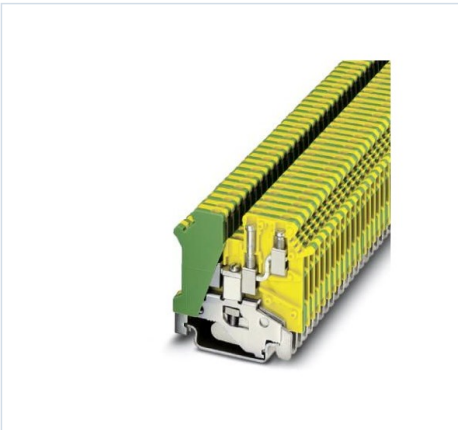

Manufacturer	PHOENIX CONTACT
MPN / Reference	UK 3-TWIN-PE
Catalog number	1923128
Category	Ground terminal block
Minimum order	50 Pcs
Document ID	EO-1037E3E91D
Generated	2026-08-04

Product Overview

Ground modular terminal block

Terminal block for 1-level protective conductor with double connection on one side, cross-section: 0.2 - 2.5 mm², width: 5.2 mm, colour: green-yellow

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs
--------------	-------------------------------

Additional Product Information

Key Commercial Data

Orderkey 1923128

Packing unit 50 pc

Catalog page Page 430 (C-1-2017)

GTIN 4017918052492

Weight per Piece (excluding packing) 20.400 g

Custom tariff number 85369010

Country of origin GR (Greece)

General

Number of levels 2

Number of connections 3

Nominal cross section 2.5 mm²

Color green-yellow

Insulating material PA

Flammability rating according to UL 94 V0

Rated surge voltage 6 kV

Degree of pollution 3

Overvoltage category III

Insulating material group I

Connection in acc. with standard IEC 60947-7-2

Open side panel No

Relative insulation material temperature index (Elec., UL 746 B) 125 °C

Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) 125 °C

Dimensions

Length 50.5 mm

Width 5.2 mm

Height NS 35/7,5 47 mm

Height NS 35/15 54.5 mm

Height NS 32 52 mm

Connection data

Connection method Screw connection

Conductor cross section solid min. 0.2 mm²

Conductor cross section solid max. 2.5 mm²

Conductor cross section flexible min. 0.2 mm²

Conductor cross section flexible max. 2.5 mm²

Conductor cross section AWG min. 24

Conductor cross section AWG max. 14

Conductor cross section flexible, with ferrule without plastic sleeve min. 0.25 mm²

Conductor cross section flexible, with ferrule without plastic sleeve max. 1.5 mm²

Conductor cross section flexible, with ferrule with plastic sleeve min. 0.25 mm²

Conductor cross section flexible, with ferrule with plastic sleeve max. 1 mm²

Cross section with insertion bridge, solid max. 4 mm²

Cross section wit...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UK 3-TWIN-PE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.