


INDUSTRIAL COMPONENT DATA

UCS CCD 5015 1056065 PHOENIX CONTACT Corner inlay for UCS housings with integrated screw boss material: poly..

Brand: PHOENIX CONTACT | Manufacturer Part Number: UCS CCD 5015

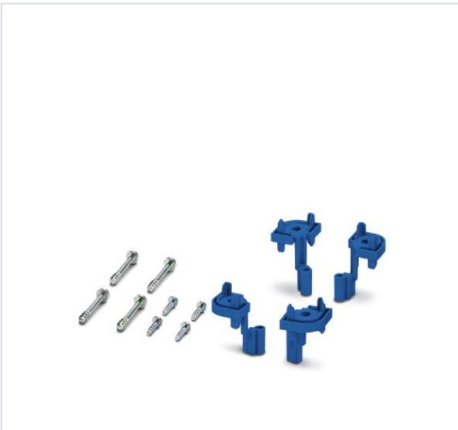

Manufacturer	PHOENIX CONTACT
MPN / Reference	UCS CCD 5015
Catalog number	1056065
Category	Extruded profile modular housing
Minimum order	1 Pcs
Document ID	EO-57EF77607D
Generated	2026-08-05

Product Overview

Corner inlay for UCS housings with integrated screw boss; material: polyamide; color: sky blue, similar to RAL 5015

Angular inserts for UCS housings with integrated threaded mandrel; Material: Polyamide; Color: Sky Blue, similar to RAL 5015

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Housing (HS)
--------------	--------------------------------

Additional Product Information

Key Commercial Data

Orderkey 1056065

Packing unit 1

GTIN 4055626695006

Custom tariff number 39269097

Item properties

Material specifications

PCB data

Packaging information

Classifications

Measurements

Ambient conditions

Note on mounting

[Standards and regulations](#)

[Item properties](#)

Type UCS CCD 5015

Order No. 1056065

[Housing type Universal housings](#)

[Type Including flat screws and screws for PCB mounting](#)

[Back to topMeasurements](#)

Width [w] 16.2 mm

Height [h] 16.2 mm

Depth [d] 27.05 mm

[Back to topMaterial specifications](#)

Color (RAL) sky blue (5015)

Insulating material PA

Flammability rating according to UL 94 V0

Housing material PA

[Back to topAmbient conditions](#)

Ambient temperature (storage/transport) -40 °C ... 55 °C

[Back to topPCB data](#)

Note on PCB holders This product is prepared for a printed-circuit board. Additional printed-circuit boards can be mounted using adhesive pads (accessories).

PCB thickness 0.8 mm ... 3 mm

Type of PCB mount Bolt mounting

[Back to topNote on mounting](#)

Drive form screw head Mounting the PCB: Slotted Torx®(T7)

[Back to topPackaging information](#)

Pieces per package 1

Denomination packing units Pcs.

[Back to topStandards and regulations](#)

Flammability rating according to UL 94 V0

[Back to topClassifications](#)

eCl@ss

eCl@ss 5.1 27180506

eCl@ss 6.0 27180800

eCl@ss 7.0 27182702

eCl@ss 8.0 27182702

eCl@ss 9.0 27182702

[Back to topETIM](#)

ETIM 5.0 EC001031

ETIM 6.0 EC001031

ETIM 7.0 EC001031

[Back to top](#)

ETIM for 1056065 Low-voltage industrial controls and switchgear (EC00...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UCS CCD 5015 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.