


INDUSTRIAL COMPONENT DATA

UTWE 6/9+1 1029711 PHOENIX CONTACT Test terminal strip

Brand: PHOENIX CONTACT | Manufacturer Part Number: UTWE 6/9+1

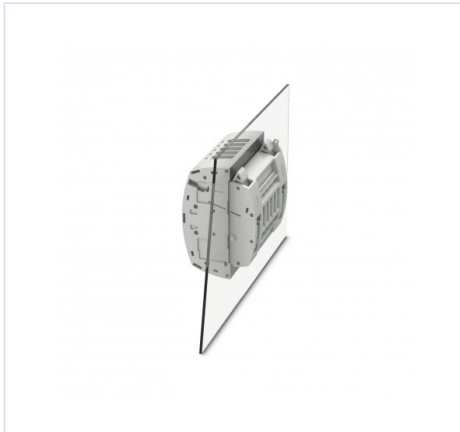

Manufacturer	PHOENIX CONTACT
MPN / Reference	UTWE 6/9+1
Catalog number	1029711
Category	Test plug for terminal blocks
Minimum order	5 Pcs
Document ID	EO-7598B2F56B
Generated	2026-07-31

Product Overview

Test terminal strip

Test pin strip, rated voltage: 400 V, rated current: 24 A, number of connections: 20, number of poles: 10, connection type: Screw connection, 1st floor, Sizing cross-section: 6 mm², cross-section: 0.2 mm² - 10 mm², mounting class: Wall mounting, color: gray

Test header, Nominal voltage: 400 V, Rated current: 24 A, Number of connections: 20, Number of poles: 10, Connection type: Screw connection, 1st floor, Rated cross-section: 6 mm², Cross-section: 0.2 mm² - 10 mm², Mounting type: Wall mounting, Colour: grey

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Enclosures connectivity
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1029711

Packing unit 5 pc

Minimum order quantity 5 pc

Note Made to Order (non-returnable)

GTIN 4055626531533

Weight per Piece (excluding packing) 22.220 g

Custom tariff number 85369010

Country of origin PL (Poland)

General

Number of positions 10
Number of levels 1
Number of connections 20
Potentials 10
Nominal cross section 6 mm²
Color gray
Insulating material PA
Flammability rating according to UL 94 V0
Maximum load current 30 A
Rated surge voltage 4 kV
Test surge voltage 5 kV
Overvoltage category III
Insulating material group I
Maximum power dissipation for nominal condition 1.31 W
Maximum load current 30 A (with 10 mm² conductor cross section)
Nominal current I_N 24 A
Nominal voltage U_N 400 V
Open side panel No
Terminal block mounting 0.8 Nm ... 1 Nm
Dimensions
Width 115 mm
Height 81 mm
Plate thickness 1 mm ... 4 mm
Pitch 8.2 mm
Connection data
Connection method Screw connection
Connection in acc. with standard IEC 60947-7-1
Conductor cross section solid min. 0.2 mm²
Conductor cross section solid max. 10 mm²
Conductor cross section AWG min. 24
Conductor cross section AWG max. 8
Conductor cross section flexible min. 0.2 mm²
Conductor cross section flexible max. 10 mm²
Min. AWG conductor cross section, flexible 24
Max. AWG conductor cross section, flexible 8
Conductor cross section flexible, with ferrule without plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max. 6 mm²
Conductor cross section fl...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UTWE 6/9+1 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.