


INDUSTRIAL COMPONENT DATA

VF-SI/TR5/8AT 2901006 PHOENIX CONTACT Fuse set

Brand: PHOENIX CONTACT | Manufacturer Part Number: VF-SI/TR5/8AT

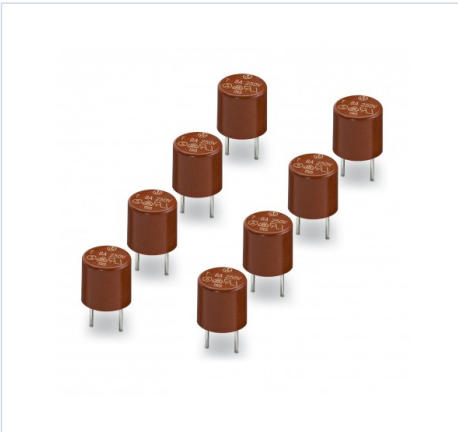

Manufacturer	PHOENIX CONTACT
MPN / Reference	VF-SI/TR5/8AT
Catalog number	2901006
Category	Cylindrical fuse
Minimum order	1 Pcs
Document ID	EO-8EC68ADED4
Generated	2026-08-06

Product Overview

Fuse set

Fuse set, quantity: 8 Units, fuse type: Fuse (TR5), rated current: 8 A, trip characteristic: slow (T)

Fuse set, number: 8 Pcs., fuse type: Fuse (TR5), nominal current: 8 A, tripping characteristic: slow-blow (T)

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > INTERFACE Components (IF)
--------------	---

Additional Product Information

Technical dataNotesNotes on operation For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.

Product propertiesProduct type Fuse

Number of fuses in the set 8

Electrical propertiesTripping characteristic slow-blow (T)

Rated voltage 250 V

Maximum power dissipation for nominal condition 1 W

Nominal current IN 8 A

Fuse rating TR5

Fuse Fuse

DimensionsDimensions 8.5 x 8 mm

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / VF-SI/TR5/8AT with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.