


INDUSTRIAL COMPONENT DATA

VIP-PA-2X14/26/ 2,0M/1756/062 1162593 PHOENIX CONTACT VARIOFACE VIP front adapter, with connected system cab..

Brand: PHOENIX CONTACT | Manufacturer Part Number: VIP-PA-2X14/26/ 2,0M/1756/062

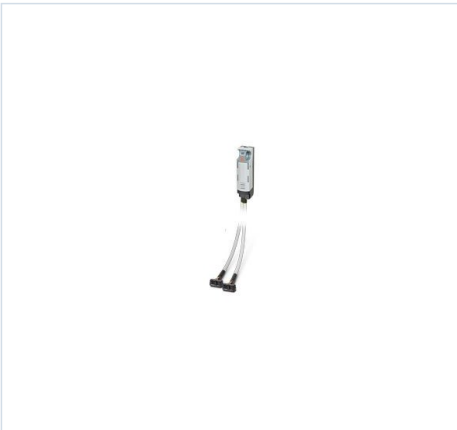

Manufacturer	PHOENIX CONTACT
MPN / Reference	VIP-PA-2X14/26/ 2,0M/1756/062
Catalog number	1162593
Category	Accessories/spare parts for controls
Minimum order	1 Pcs
Document ID	EO-3D9AED9F61
Generated	2026-08-04

Product Overview

VARIOFACE VIP front adapter, with connected system cables for ControlLogix® 1756 I/O module, connectable up to 2 x 8 channels.

VIP VARIOFACE front adapter, with connected system cables for ControlLogix® 1756 I/O. Up to 2 x 8 channels can be connected., cable length: 2 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > INTERFACE Components (IF)
--------------	---

Additional Product Information

Technical dataProduct propertiesProduct type Front adapter
Product family VARIOFACE Professional
Electrical propertiesMax. permissible operating voltage 120 V AC
Max. permissible current 1 A (per path)
3 A (per group, positive terminals)
8 A (per group, negative terminals)
Supported controller ALLEN-BRADLEY ControlLogix
Suitable I/O card 1756-IA16
1756-IB16
1756-IC16
1756-IN16
Connection dataCross section AWG (converted acc. to IEC)

Controller level

Connection method Plug-in connection

Note Can be plugged onto 20-pos. I/O modules

Field level

Connection in acc. with standard IEC 60603-13

Connection method IDC/FLK socket strip

Number of connections 2

Number of positions 14

Pitch 2.54 mm

Supply

Connection method Push-in / plug connection

Stripping length 9 mm

Conductor cross section rigid 0.14 mm² ... 1.5 mm²

Conductor cross section flexible 0.14 mm² ... 1.5 mm²

Conductor cross section AWG 26 ... 16

DimensionsItem dimensions

Width 344.822 mm

Height 47.352 mm

Depth 56.345 mm

Cable

Length 2 m

Cable/line14X0.14 [PVC]

UL AWM Style 2464/1061

Number of positions 14

Shielded no

Cable type 14X0.14 [PVC]

Conductor type Round cable set

Conductor structure signal line 7x 0.16 mm

AWG signal line 26

Conductor cross section 14x 0.14 mm²

Wire diameter incl. insulation 1 mm ±0.03 mm

External cable diameter 6.4 mm ±0.4 mm

Outer sheath, material Semi-rigid PVC

External sheath, color gray

Conductor material Tin-plated Cu litz wires

Cable resistance ≤ 145 Ω/km (20 °C)

Insulation resistance ≥ 20 MΩ...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / VIP-PA-2X14/26/ 2,0M/1756/062 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.