


INDUSTRIAL COMPONENT DATA

VS-04-2X2X26C7/7-SDA/SDA/3,5 1563151 PHOENIX CONTACT Patch cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: VS-04-2X2X26C7/7-SDA/SDA/3,5

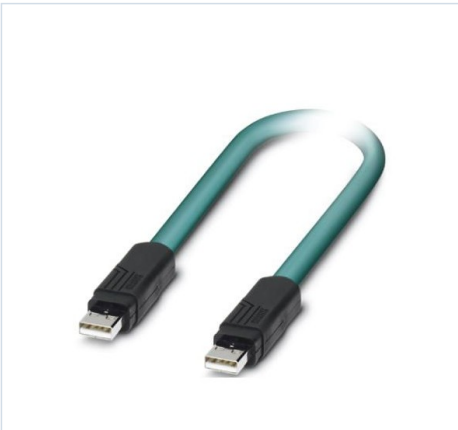

Manufacturer	PHOENIX CONTACT
MPN / Reference	VS-04-2X2X26C7/7-SDA/SDA/3,5
Catalog number	1563151
Category	Sensor-actuator patch cord
Minimum order	25 Pcs
Document ID	EO-7B1C75774E
Generated	2026-08-05

Product Overview

Patch cable

Ready-made USB cable, shielded, colour: RAL 5021 (aqua blue), PUR outer wrap, USB Type-A/standard to USB Type-A/standard, length: 3.5 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Field Device Connectors (FDC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1563151

Packing unit 1 pc

Minimum order quantity 25 pc

Note Made to Order (non-returnable)

GTIN 4046356302531

Weight per Piece (excluding packing) 229.500 g

Custom tariff number 85444290

Country of origin DE (Germany)

Mechanical characteristics

Number of positions 4

Shielded yes

Insertion/withdrawal cycles >= 500

Cable diameter 6.70 mm
Cable structure 2x2xAWG26/7 + 2xAWG20/19; S/FTP
Degree of protection IP20
Ambient conditions
Ambient temperature (operation) -20 °C ... 60 °C (cable, fixed installation)
0 °C ... 50 °C (cable, flexible installation)
Plug / socket
Degree of protection IP20
Material data
Housing material PA
Outer sheath, material PUR
External sheath, color water blue RAL 5021
Electrical characteristics
Rated voltage (III/3) 125 V
Rated current 1 A
Transmission characteristics (category) USB 2.0
Line characteristics
Cable type FireWire
Cable structure 2x2xAWG26/7 + 2xAWG20/19; S/FTP
Conductor cross section 2x 2x 0.14 mm² (Signal line)
2x 0.5 mm² (Power supply)
AWG signal line 26
Conductor structure signal line 7x 0.15 mm
AWG power supply 20
Conductor structure, voltage supply 19x 0.20 mm
Core diameter including insulation ≤ 1.05 mm (Signal line)
nom. 1.4 mm (Power supply)
External cable diameter 6.7 mm
Wire colors White-blue, white-orange, white, black
External sheath, color water blue RAL 5021
Insulation resistance 5 G?·km
Conductor resistance 150 ?/km
Transmission characteristics (category) CAT7, for USB 2.0 (480 Mbps)
Working capaci...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / VS-04-2X2X26C7/7-SDA/SDA/3,5 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.