


INDUSTRIAL COMPONENT DATA

VS-OE-OE-94F/300,0 1403662 PHOENIX CONTACT Network cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: VS-OE-OE-94F/300,0

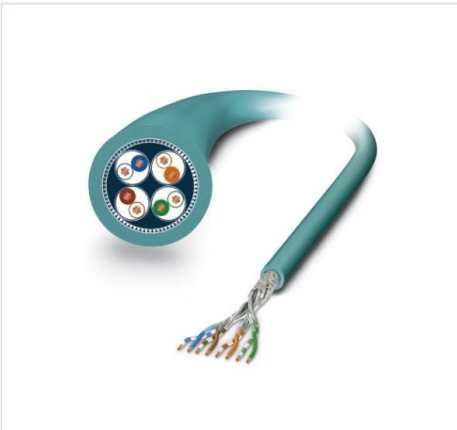

Manufacturer	PHOENIX CONTACT
MPN / Reference	VS-OE-OE-94F/300,0
Catalog number	1403662
Category	Data and communication cable
Minimum order	1 Pcs
Document ID	EO-772896CA19
Generated	2026-08-05

Product Overview

Network cable

Network cable, CAT6A Ethernet (10 GBit/s), 8-pole halogen-free, shielded, free cable end, to free cable end, cable length: 300 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1403662

Packing unit 1 pc

GTIN 4046356662833

Weight per Piece (excluding packing) 17,091.620 g

Custom tariff number 85444210

Country of origin DE (Germany)

Dimensions

Length of cable 300 m

General data

Rated voltage 30 V AC

30 V DC

Number of positions 8

Signal type/category Ethernet CAT6A, 10 Gbps
Cable
Cable type Ethernet 10 Gbit
Cable type (abbreviation) 94F
UL AWM style 20963 (80°C/30 V)
Signal type/category Ethernet CAT6A, 10 Gbps
Cable structure 4x2xAWG26/7; S/FTP
Conductor cross section 4x 2x 0.14 mm²
AWG signal line 26
Conductor structure signal line 7x 0.16 mm
Core diameter including insulation 1.04 mm
Wire colors white/blue-blue, white/orange-orange, white/green-green, white/brown-brown
Twisted pairs 2 cores to the pair
Type of pair shielding Aluminum-lined foil
Overall twist 4 pairs for core
Shielding Tinned copper braided shield
Optical shield covering 70 %
External sheath, color water blue RAL 5021
Outer sheath thickness 0.65 mm
External cable diameter D 6.4 mm ±0.2 mm
Minimum bending radius, fixed installation 4 x D
Minimum bending radius, flexible installation 8 x D
Tensile strength GRP ≤ 100 N
Cable weight 42 kg/km
Outer sheath, material PUR
Material conductor insulation Foamed PE
Conductor material Bare Cu litz wires
Insulation resistance ≥ 500 MΩ*km
Loop resistance ≤ 290.00 Ω/km
Cable capacity 47 nF/km
Wave impedance 100 Ω ±5 Ω (at 100 MHz)
Near end crosstalk attenuation (NEXT) 75.3 dB (with 1 MHz)
66.3 dB (at 4 ΩHz)
61.8 dB (at....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / VS-OE-OE-94F/300,0 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.