


**INDUSTRIAL COMPONENT DATA**

# PML-W101 (12,5X12,5) 0830432 PHOENIX CONTACT Warning label

Brand: PHOENIX CONTACT | Manufacturer Part Number: PML-W101 (12,5X12,5)

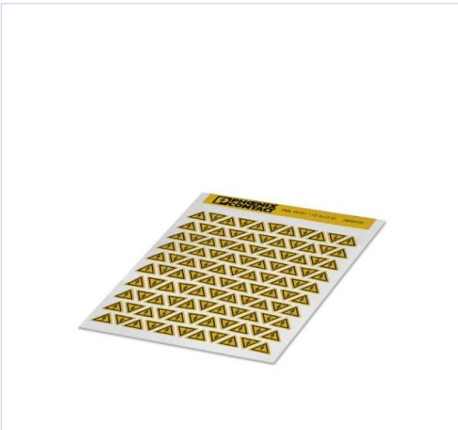

|                 |                       |
|-----------------|-----------------------|
| Manufacturer    | PHOENIX CONTACT       |
| MPN / Reference | PML-W101 (12,5X12,5)  |
| Catalog number  | 0830432               |
| Category        | Warning/signing plate |
| Minimum order   | 5 Pcs                 |
| Document ID     | EO-A92F131707         |
| Generated       | 2026-08-01            |

## Product Overview

Warning label

Warning plate, Elbow, yellow/black, labeled: Lightning with arrow, mounting type: glued, diameter: 0 mm, usable area: 12.5x12.5mm, Number of individual indexes: 110

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                               |
|--------------|-------------------------------|
| Catalog path | PHOENIX CONTACT > MS Material |
|--------------|-------------------------------|

## Additional Product Information

Key Commercial Data

Orderkey 0830432

Packing unit 5 pc

Minimum order quantity 5 pc

Note Made to Order (non-returnable)

Catalog page Page 105 (NTK-2012)

GTIN 4046356717564

Weight per Piece (excluding packing) 5.840 g

Custom tariff number 39199080

Country of origin DE (Germany)

Dimensions

Length (b) 12.5 mm

Width (a) 12.5 mm

Height (c) 10.83 mm

Diameter 0.00 mm

Ambient conditions

Ambient temperature (operation) -40 °C ... 90 °C

Ambient temperature (assembly) > 8 °C

Recommended storage conditions 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.

General

Color yellow/black

Type Triangle

Components Silicone-free

Material PVC

RoHS compliant Yes

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Printing Lightning flash

Number of individual labels 110

Number of individual labels per row 11

Adhesive Acrylic

Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02

Result Test passed

Test specification weathering-resistance Following ISO 4892-2:2013-03

Test duration 96 h

Wipe resistance test result Test passed

Salt spray test specification DIN EN 60068-2-11:2000-02

Test duration 96 h

Salt spray testing result Test passed

Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07

Result Test passed

Foil strength 50 µm

Marking mounting type adhesive

Standards and Regulations

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Environmental Product Compliance

REACH SVHC Reaction mass of DOT...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / PML-W101 (12,5X12,5) with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.