


**INDUSTRIAL COMPONENT DATA**

# CD 80X60 3240194 PHOENIX CONTACT Cable duct

Brand: PHOENIX CONTACT | Manufacturer Part Number: CD 80X60

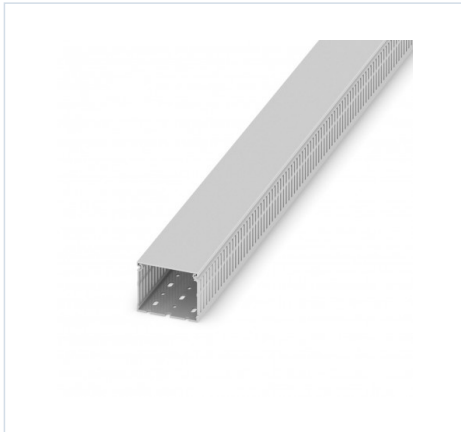

|                 |                               |
|-----------------|-------------------------------|
| Manufacturer    | PHOENIX CONTACT               |
| MPN / Reference | CD 80X60                      |
| Catalog number  | 3240194                       |
| Category        | Slotted cable trunking system |
| Minimum order   | 16 Pcs                        |
| Document ID     | EO-A6EA22B968                 |
| Generated       | 2026-07-31                    |

## Product Overview

**Cable duct**

Wiring channel for installation and assembly in control cabinets, grey, formed by upper and lower part, width: 80 mm, height: 60 mm, length: 2000 mm

Duct for installation and installation in control cabinets, grey, consisting of top and bottom, width: 80 mm, height: 60 mm, length 2,000 mm

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                              |
|--------------|------------------------------|
| Catalog path | PHOENIX CONTACT > Cable duct |
|--------------|------------------------------|

## Additional Product Information

**Key Commercial Data**

Orderkey 3240194

Packing unit 10 pc

Minimum order quantity 10 pc

Catalog page Page 625 (C-3-2017)

GTIN 4046356459204

Weight per Piece (excluding packing) 1,400.000 g

Custom tariff number 39259020

Country of origin DE (Germany)

**Dimensions**

Length (b) 2000 mm

Width (a) 80 mm

Height (c) 60 mm

Diameter 80.00 mm

Ambient conditions

Ambient temperature (operation) -5 °C ... 60 °C

General

Color gray

7030

Components Lead-free

Flammability rating according to UL 94 V0

Material PVC

Nominal cross section 2970 mm<sup>2</sup>

Standards and Regulations

Halogen-free no

Connection in acc. with standard CSA

Flammability rating according to UL 94 V0

Environmental Product Compliance

China RoHS Environmentally friendly use period: unlimited = EFUP-e

No hazardous substances above threshold values

Classifications

eCl@ss 4.027140602eCl@ss 4.127140602eCl@ss 5.027140602eCl@ss 5.127140600eCl@ss 6.027400700eCl@ss  
7.027400703eCl@ss 8.027400703eCl@ss 9.027400703

ETIM 2.0EC000012ETIM 3.0EC000012ETIM 4.0EC000012ETIM 5.0EC000012ETIM 6.0EC000012

UNSPSC 6.0130101815UNSPSC 7.090130101815UNSPSC 1130101815UNSPSC 12.0130101815UNSPSC  
13.239131712

ETIM for 3240194 Slotted cable trunking (EC000012)

Feature Name

Feature Value

Height (EF000040)

60 mm

Width (EF000008)

80 mm

Length (EF001438)

2000 mm

Distance of slots (EF005246)

6.5 mm

Slit width (EF005247)

6 mm

Type of side wall (EF000098)

Slotted

Halogen free (EF000025)

No

Self-extinguishing (EF000681)

No

Flexible (EF000083)

No

With cover (EF007965)

No

Colour....

**REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW**

Send PHOENIX CONTACT / CD 80X60 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.