


INDUSTRIAL COMPONENT DATA

WMS-2 HF 4,8 (EX9)R OG 0804498 PHOENIX CONTACT Shrink sleeve

Brand: PHOENIX CONTACT | Manufacturer Part Number: WMS-2 HF 4,8 (EX9)R OG

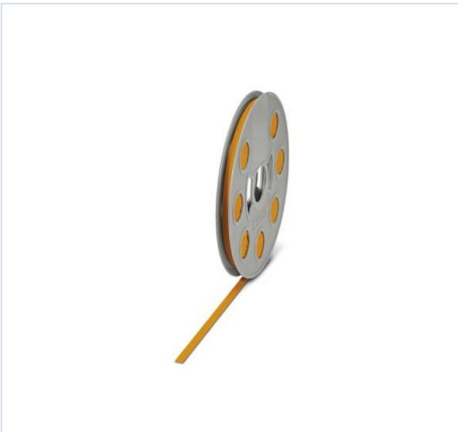

Manufacturer	PHOENIX CONTACT
MPN / Reference	WMS-2 HF 4,8 (EX9)R OG
Catalog number	0804498
Category	Cable coding system
Minimum order	1 Pcs
Document ID	EO-D1E876EBDE
Generated	2026-08-05

Product Overview

Shrink sleeve

Heat shrink tubing, Roll, orange, unlabeled, labelable with: THERMOMARK E.SLEEVE, THERMOMARKE.300 (D)/600 (D), THERMOMARK ROLLMASTER 300/600, THERMOMARK ROLL X1, THERMOMARK ROLL, THERMOMARK ROLL 2.0, THERMOMARK W, THERMOMARK X1.2, UNDRILLED, MOUNTING CLASS: SLIP, CABLE DIAMETER RANGE (AUTOMATED PROCESSING): 2.4 ... 4.5 mm, cable diameter range: 2.4 ... 4.8 mm, usable area: 9x30000mm, length. Roll: 30 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > MS Material
--------------	-------------------------------

Additional Product Information

Key Commercial Data

Orderkey 0804498

Packing unit 1 pc

Note Made to Order (non-returnable)

GTIN 4055626381183

Weight per Piece (excluding packing) 334.400 g

Custom tariff number 39173200

Country of origin PL (Poland)

Standards and Regulations

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Fire protection for rail vehicles (DIN EN 45545-2) R22 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R23 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R24 HL 1 - HL 3

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Fire protection for rail vehicles (DIN EN 45545-2) R22 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R23 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R24 HL 1 - HL 3

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Fire protection for rail vehicles (DIN EN 45545-2) R22 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R23 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R24 HL 1 - HL 3

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Fire protection for rail vehicles (DIN EN 45545-2) R22 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R23 HL 1 - HL 3

Fire protection for rail vehicles (DIN EN 45545-2) R24 HL 1 - HL 3

Classifications

eCl@ss 5.1 27400100 eCl@ss 6.0 27400100 eCl@ss 7.0 27400105 eCl@ss 8.0 27400401 eCl@ss 9.0 27400401

ETIM 5.0 EC000217 ETIM 6.0 EC000217

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / WMS-2 HF 4,8 (EX9)R OG with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.