


INDUSTRIAL COMPONENT DATA

3SE5232-0CK31-1AJ0 SIEMENS Position switch Plastic 31 mm according to EN 50047 Increased corrosion protectio..

Brand: SIEMENS | Manufacturer Part Number: 3SE5232-0CK31-1AJ0

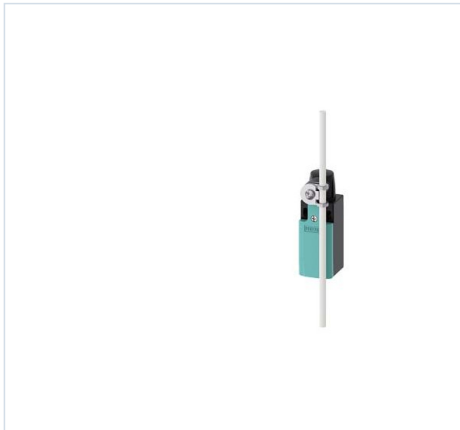

Manufacturer	SIEMENS
MPN / Reference	3SE5232-0CK31-1AJ0
Catalog number	52320
Category	End switch
Minimum order	1 Pcs
Document ID	EO-2146D09A0F
Generated	2026-08-06

Product Overview

Position switch Plastic 31 mm according to EN 50047 Increased corrosion protection Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts Rotary actuator right/left adjustable, with Stainless steel lever and plastic roller 19 mm functional at -40 °C Shock and vibration test according to EN 61373, Category 1B
 INTERRUPT. OF SIRIUS POSITION, PLASTIC 31MM, ACCORDING TO EN50047 C / PROT. INCREASED ANTICORROSIVE, CONEX. INTEGRATED 1X (M20X1,5)1S/ 1OE ACC CONTACTS. ABRUPT ACCTO. GIRAT LEVER. ADJUSTABLE DCHA/LEFT, WITH STAINLESS STEEL LEVER. AND PLASTIC ROLLERS 19MM SUITABLE TO OPERATE AT -40 GRAD, SCHOCK TEST AND VIBRATIONS ACCORDING TO EN61373, CATEGORY 1B

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path **SIEMENS > CONTROL AND CONTACTORS > Limit Switches and safety relays**

Additional Product Information

Technical data

Position switch Plastic 31 mm according to EN 50047 Increased corrosion protection Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts Rotary actuator right/left adjustable, with Stainless steel lever and plastic roller 19 mm functional at -40 °C Shock and vibration test according to EN 61373, Category 1B

product brand name SIRIUS

product designation Mechanical position switches

product type designation 3SE5

manufacturer's article number

? of the supplied actuator head for position switches 3SE5000-0AK00-1AJ0

? of the supplied operating lever 3SE5000-0AA31-1AJ0

? of the supplied switching contacts 3SE5000-0CA00

suitability for use safety switch Yes

General technical data

product function positive opening Yes

insulation voltage rated value 400 V

degree of pollution class 3

surge voltage resistance rated value 6 kV

protection class IP IP65

shock resistance

? according to IEC 60068-2-27 30g / 11 ms

? for railway applications according to EN 61373 Category 1, Class B

vibration resistance

? according to IEC 60068-2-6 0.35 mm/5g

? for railway applications according to EN 61373 Category 1, Class B

mechanical service life (switching cycles) typical 15 000 000

electrical endurance (switching cycles) at AC-15 at 230 V typical 100 000

electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical 10 000 000

Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send SIEMENS / 3SE5232-0CK31-1AJ0 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.