


INDUSTRIAL COMPONENT DATA

3SE5232-0HC05-1AB3 SIEMENS Position switch with plastic enclosure Control cabinet type without mounting plat..

Brand: SIEMENS | Manufacturer Part Number: 3SE5232-0HC05-1AB3

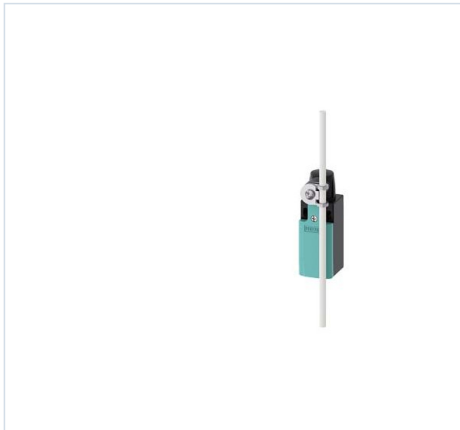

Manufacturer	SIEMENS
MPN / Reference	3SE5232-0HC05-1AB3
Catalog number	52320
Category	End switch
Minimum order	1 Pcs
Document ID	EO-C40D7EB87F
Generated	2026-08-05

Product Overview

Position switch with plastic enclosure Control cabinet type without mounting plate EN 50047, 1 x (M20 x 1.5) integrated (not replaceable) Rounded plunger Degree of protection IP40, with Self-sealing grommet Standard cover, turquoise without locking sheet metal, without gasket, without screws

SWITCH POSITION SIRIUS PLASTIC BOX TYPE CABINET ELEC. WITHOUT FIXED PLATE, EN50047, 1X(M20X1,5); 1NA/1NC CONTAC.DE ACC. ABRUPT INTEGRATED (NOT INTERCHANGEABLE) REINFORCED STRAP, IP40 DEGREE OF PROTECTION, WITH GLAND, BLACK BOX, TURQUOISE BLUE LID, WITHOUT ENCLAVEMENT PLATE, WITHOUT JOINT, WITHOUT SCREWS. Manufactured to order. Non-Cancelable Non-Returnable.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path **SIEMENS > CONTROL AND CONTACTORS > Limit Switches and safety relays**

Additional Product Information

Technical data

Position switch with plastic enclosure Control cabinet type without mounting plate EN 50047, 1 x (M20 x 1.5) integrated (not replaceable) Rounded plunger Degree of protection IP40, with Self-sealing grommet Standard cover, turquoise without locking sheet metal, without gasket, without screws

product brand name SIRIUS

product designation Mechanical position switches

product type designation 3SE5

suitability for use safety switch Yes

General technical data

product function positive opening Yes
insulation voltage rated value 400 V
degree of pollution class 3
surge voltage resistance rated value 6 kV
protection class IP IP40
shock resistance
? according to IEC 60068-2-27 30g / 11 ms
vibration resistance
? according to IEC 60068-2-6 0.35 mm/5g
mechanical service life (switching cycles) typical 15 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical 100 000
electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical 10 000 000
Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 6 000
thermal current 10 A
material of the enclosure of the switch head plastic
reference code according to IEC 81346-2 B
continuous current of the C characteristic MCB 1 A; for a short-circuit current smaller than 400 A
continuous current of the quick DIAZED fuse link 10 A; for a short-circuit current smaller than 400 A
continuous current of the DIAZED fuse link gG...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send SIEMENS / 3SE5232-0HC05-1AB3 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.