


INDUSTRIAL COMPONENT DATA

3SE5232-0HK11-1FA0 SIEMENS Position switch Plastic enclosure according to EN 50047, 31 mm Device connection ..

Brand: SIEMENS | Manufacturer Part Number: 3SE5232-0HK11-1FA0

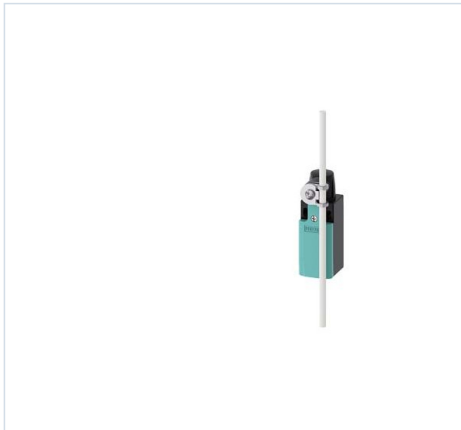

Manufacturer	SIEMENS
MPN / Reference	3SE5232-0HK11-1FA0
Catalog number	52320
Category	End switch
Minimum order	1 Pcs
Document ID	EO-2B974FC96F
Generated	2026-08-05

Product Overview

Position switch Plastic enclosure according to EN 50047, 31 mm Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts integrated (not replaceable) Twist lever, stainless steel 27 mm long right/left adjustable with plastic roller 19 mm without mounting/operating instructions

SIRIUS POSITION SWITCH; PLASTIC BOX ACCORDING TO EN50047, 31MM INTEGRATED CONNECTION 1X(M20X1,5); CONTACTS ACC. ABRUPT 1NA/1NC INTEGRATED (NOT REPLACEABLE) ROLLER LEVER, STAINLESS STEEL. 27MM LENGTH; ADJUSTABLE TO RIGHT/LEFT. WITH 19MM PLASTIC ROLLER WITHOUT ASSEMBLY/INSTRUCTIONS. Manufactured to order. Non-Cancelable Non-Returnable.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path **SIEMENS > CONTROL AND CONTACTORS > Limit Switches and safety relays**

Additional Product Information

Technical data

Position switch Plastic enclosure according to EN 50047, 31 mm Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts integrated (not replaceable) Twist lever, stainless steel 27 mm long right/left adjustable with plastic roller 19 mm without mounting/operating instructions

product brand name SIRIUS

product designation Mechanical position switches

product type designation 3SE5

manufacturer's article number

? of the supplied actuator head for position switches 3SE5000-0AK00

? of the supplied operating lever 3SE5000-0AA11

suitability for use safety switch Yes

General technical data

product function positive opening Yes

insulation voltage rated value 400 V

degree of pollution class 3

surge voltage resistance rated value 6 kV

protection class IP IP65

shock resistance

? according to IEC 60068-2-27 30g / 11 ms

vibration resistance

? according to IEC 60068-2-6 0.35 mm/5g

mechanical service life (switching cycles) typical 15 000 000

electrical endurance (switching cycles) at AC-15 at 230 V typical 100 000

electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical 10 000 000

Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 6 000

thermal current 10 A

material of the enclosure of the switch head plastic

reference code according to IEC 81346-2 B

continuous current of the C characteristic MCB 1 A; for a short-circuit current smaller than 400 A

continuo...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send SIEMENS / 3SE5232-0HK11-1FA0 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.