


**INDUSTRIAL COMPONENT DATA**

# 3SE5232-0HK15 SIEMENS Position switch Plastic enclosure according to EN 50047, 31 mm Device connection 1 x (..

Brand: SIEMENS | Manufacturer Part Number: 3SE5232-0HK15

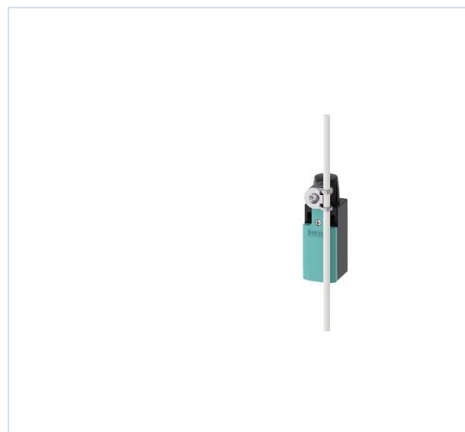

|                 |               |
|-----------------|---------------|
| Manufacturer    | SIEMENS       |
| MPN / Reference | 3SE5232-0HK15 |
| Catalog number  | 52320         |
| Category        | End switch    |
| Minimum order   | 1 Pcs         |
| Document ID     | EO-DA5A002EF7 |
| Generated       | 2026-08-06    |

## Product Overview

Position switch Plastic enclosure according to EN 50047, 31 mm Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts integrated (not replaceable) Twist lever, 35 mm long right/left adjustable with plastic roller 19 mm

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

Catalog path **SIEMENS > CONTROL AND CONTACTORS > Limit Switches and safety relays**

## Additional Product Information

**Technical data**

Position switch Plastic enclosure according to EN 50047, 31 mm Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts integrated (not replaceable) Twist lever, 35 mm long right/left adjustable with plastic roller 19 mm

product brand name SIRIUS

product designation Mechanical position switches

product type designation 3SE5

manufacturer's article number

? of the supplied actuator head for position switches 3SE5000-0AK00

? of the supplied operating lever 3SE5000-0AA15

suitability for use safety switch Yes

**General technical data**

product function positive opening Yes

insulation voltage rated value 400 V

degree of pollution class 3

surge voltage resistance rated value 6 kV

protection class IP IP65

shock resistance

? according to IEC 60068-2-27 30g / 11 ms

vibration resistance

? according to IEC 60068-2-6 0.35 mm/5g

mechanical service life (switching cycles) typical 15 000 000

electrical endurance (switching cycles) at AC-15 at 230 V typical 100 000

electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical 10 000 000

Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 6 000

thermal current 10 A

material of the enclosure of the switch head plastic

reference code according to IEC 81346-2 B

continuous current of the C characteristic MCB 1 A; for a short-circuit current smaller than 400 A

continuous current of the quick DIAZED fuse link 10 A; for a sho...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send SIEMENS / 3SE5232-0HK15 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.