


INDUSTRIAL COMPONENT DATA

3SE5232-0LU21 SIEMENS Hinge switch Plastic enclosure, 31 mm according to EN 50047 Device connection 1 x (M20..

Brand: SIEMENS | Manufacturer Part Number: 3SE5232-0LU21

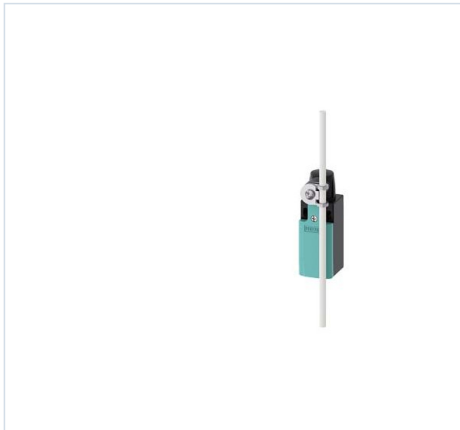

Manufacturer	SIEMENS
MPN / Reference	3SE5232-0LU21
Catalog number	52320
Category	Hinge switch
Minimum order	1 Pcs
Document ID	EO-4372250714
Generated	2026-08-05

Product Overview

Hinge switch Plastic enclosure, 31 mm according to EN 50047 Device connection 1 x (M20 x 1.5) Snap-action contacts 2 NC/1 NO integrated, with hollow shaft Diameter = 8 mm Actuating angle 10°

SIRIUS Int. hinge, 31mm plastic case, 1X connection (M20X1,5), integrated 2NC/1NA sudden action contacts, with solid shaft. Manufactured to order. Non-Cancelable Non-Returnable.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	SIEMENS > CONTROL AND CONTACTORS > Limit Switches and safety relays
--------------	---

Additional Product Information

Technical data

Hinge switch Plastic enclosure, 31 mm according to EN 50047 Device connection 1 x (M20 x 1.5) Snap-action contacts 2 NC/1 NO integrated, with hollow shaft Diameter = 8 mm Actuating angle 10°

product brand name SIRIUS

product designation Mechanical safety hinge switches

product type designation 3SE5

manufacturer's article number

? of the supplied actuator head for position switches 3SE5000-0AU21

? of the supplied switching contacts 3SE5000-0LA00

? of the supplied empty enclosure with cover 3SE5232-0AC05

suitability for use safety switch Yes

General technical data

product function positive opening Yes
insulation voltage rated value 400 V
degree of pollution class 3
surge voltage resistance rated value 6 kV
protection class IP IP65
shock resistance
? according to IEC 60068-2-27 30g / 11 ms
vibration resistance
? according to IEC 60068-2-6 0.35 mm/5g
mechanical service life (switching cycles) typical 1 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical 100 000
electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical 1 000 000
Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 6 000
thermal current 10 A
material of the enclosure of the switch head plastic / stainless steel
reference code according to IEC 81346-2 B
continuous current of the C characteristic MCB 1 A; for a short-circuit current smaller than 400 A
continuous current of...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send SIEMENS / 3SE5232-0LU21 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.