


INDUSTRIAL COMPONENT DATA

3SU1200-1SK10-2SA0 SIEMENS sensor switches, compact, 22 mm, round, plastic, black, momentary contact type, w..

Brand: SIEMENS | Manufacturer Part Number: 3SU1200-1SK10-2SA0

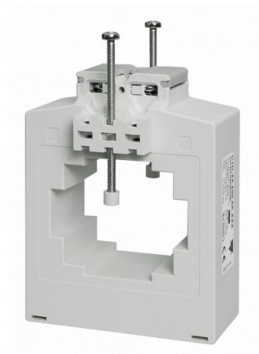

Manufacturer	SIEMENS
MPN / Reference	3SU1200-1SK10-2SA0
Catalog number	12001
Category	Push button, complete
Minimum order	1 Pcs
Document ID	EO-05A02F86D9
Generated	2026-08-05

Product Overview

sensor switches, compact, 22 mm, round, plastic, black, momentary contact type, with holder, Operating voltage 24 V DC, M12 connector, 4-pole

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	SIEMENS > CONTROL AND CONTACTORS > Commanding and signaling devices
--------------	---

Additional Product Information

Technical data

sensor switches, compact, 22 mm, round, plastic, black, momentary contact type, with holder, Operating voltage 24 V DC, M12 connector, 4-pole

product brand name SIRIUS ACT

product designation Sensor switches

design of the product Compact unit

product type designation 3SU1

product line Plastic, black, 22 mm

Enclosure

shape of the enclosure front round

number of command points 1

Actuator

principle of operation of the actuating element capacitive

product extension optional light source No

color of the actuating element black
material of the actuating element plastic
shape of the actuating element round
outer diameter of the actuating element 53.6 mm
Front ring
product component front ring No
Holder
material of the holder Plastic
General technical data
product function positive opening No
insulation voltage rated value 32 V
degree of pollution 3
type of voltage of the operating voltage DC
protection class IP IP66, IP67, IP69(IP69K)
degree of protection NEMA rating 1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance
? according to IEC 60068-2-27 sinusoidal half-wave 15g / 11 ms
? for railway applications according to EN 61373 Category 1, Class B
vibration resistance
? according to IEC 60068-2-6 10 ... 500 Hz: 5g
? for railway applications according to EN 61373 Category 1, Class B
operating frequency maximum 3 600 1/h
reference code according to IEC 81346-2 S
Substance Prohibitance (Date) 10/01/2014
operating voltage rated value 24 V
Auxiliary circuit
design of the contact....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send SIEMENS / 3SU1200-1SK10-2SA0 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.