


INDUSTRIAL COMPONENT DATA

BF80T2E110 LOVATO FOUR-POLE CONTACTOR, IEC OPERATING CURRENT ITH (AC1) 115A, AC/DC COIL, 110VAC, 2NO AND 2NC

Brand: LOVATO ELECTRIC | Manufacturer Part Number: BF80T2E110

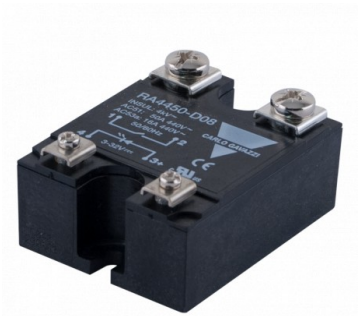

Manufacturer	LOVATO ELECTRIC
MPN / Reference	BF80T2E110
Catalog number	60110
Category	Power contactor, AC switching
Minimum order	1 Pcs
Document ID	EO-69291BAE98
Generated	2026-08-05

Product Overview

FOUR-POLE CONTACTOR, IEC OPERATING CURRENT ITH (AC1) = 115A, AC/DC COIL, 110VAC, 2NO AND 2NC
BF80T2E110, 2NO+2NC CONTACT. 115A AC1 60

Four-pole contactor, IEC operating current Ith (AC1) = 115A, AC/DC coil, 110VAC/DC, 2NO and 2NC

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LOVATO ELECTRIC > Industrial Contactors and Accessories - LOVATO ELECTRIC
--------------	---

Additional Product Information

BF80T2E110

Four-pole contactor, IEC operating current Ith (AC1) = 115A, AC/DC coil, 110VAC/DC, 2NO and 2NC

Technical specifications

Type of product: Contactors
Number of poles: 4
Type of coil: AC/DC coil
Rated coil voltage [V]: 60...110
IEC operating current Ith (AC1) [A]: 115
IEC operating current and power Ie (AC3) 400V [A/Kw]: 80A / 45Kw
UL/CSA horsepower ratings 480V [HP]: 60
Type of mounting: Screw / DIN rail 35mm
Order code BF80T2E110

Weight [g] 1342.1

Qty. per package 1

Multiple qty. of packs per order 1

Package dimensions [mm] 150X130X100

Volume [cm³] 1950

Bar code [EAN13] 8013975224212
HS Code 85365080
ETIM for BF80T2E110 Low-voltage industrial controls and switchgear (EC000066)
Feature Name
Feature Value
Voltage type for actuating (EF008242)
AC/DC
Type of electrical connection of main circuit (EF006819)
Frame clamp
Rated control supply voltage DC (EF003980)
60 V
Rated control supply voltage AC 60 Hz (EF003979)
60 V
Rated control supply voltage AC 50 Hz (EF003978)
60 V
Modular version (EF001126)
No
Rated operation current I_e at AC-1, 400 V (EF001393)
115 A
Rated operation current I_e at AC-3, 400 V (EF001392)
80 A
Number of auxiliary contacts as normally closed contact (EF001377)
0
Number of auxiliary contacts as normally open contact (EF001376)
0
Number of normally closed contacts as main contact (EF001375)
2
Number of normally open contacts as main contact (EF001374)
2

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LOVATO ELECTRIC / BF80T2E110 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.