


**INDUSTRIAL COMPONENT DATA**

# SACC-E-M12MSS-3P-M16/0,11PE PW 1106332 PHOENIX CONTACT Plug-in connector mounting mainstream.

Brand: PHOENIX CONTACT | Manufacturer Part Number: SACC-E-M12MSS-3P-M16/0,11PE PW

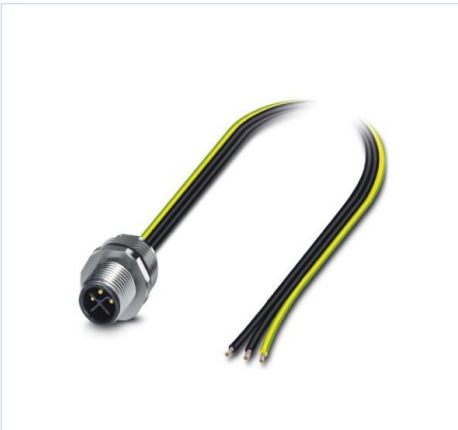

|                 |                                           |
|-----------------|-------------------------------------------|
| Manufacturer    | PHOENIX CONTACT                           |
| MPN / Reference | SACC-E-M12MSS-3P-M16/0,11PE PW            |
| Catalog number  | 1106332                                   |
| Category        | Circular connector, mounting (with cable) |
| Minimum order   | 100 Pcs                                   |
| Document ID     | EO-DF969AB43C                             |
| Generated       | 2026-08-04                                |

## Product Overview

Plug-in connector mounting mainstream.

Plug-in connector mounting incorp.

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                                                 |
|--------------|-------------------------------------------------|
| Catalog path | PHOENIX CONTACT > Field Device Connectors (FDC) |
|--------------|-------------------------------------------------|

## Additional Product Information

Key Commercial Data

Orderkey 1106332

Packing unit 1

GTIN 4055626997148

Custom tariff number 85444290

Dimensions

General

Standards and Regulations

Classifications

Ambient conditions

Connection data

Environmental Product Compliance

Dimensions

Fixed cable length 0.11

[Back to top](#)Ambient conditions

Ambient temperature (operation) -25 ... -85

[Back to top](#)General

Standards/regulations

Overvoltage category III

Mounting type Front wall/screw mounting

Coding S power

Thread type M16 x 1.5

Cable cross section 1.31

AWG signal line 16

Rated surge voltage 6 kV AC

Degree of pollution 3

Degree of protection IP67

Number of positions 3

Current 12 A

[Back to top](#)Connection data

Connection method Individual wires

[Back to top](#)Standards and Regulations

Standards/specifications

Safety note WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only. The products must be regularly inspected for damage.

Decommission defective products immediately. Replace damaged products. Repairs are not possible.

- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering....

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SACC-E-M12MSS-3P-M16/0,11PE PW with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.