


INDUSTRIAL COMPONENT DATA

MKS 620 FT 6055575 OBO BETTERMANN CABLE TRAY MKS MKS 620 FT

Brand: OBO BETTERMANN | Manufacturer Part Number: MKS 620 FT

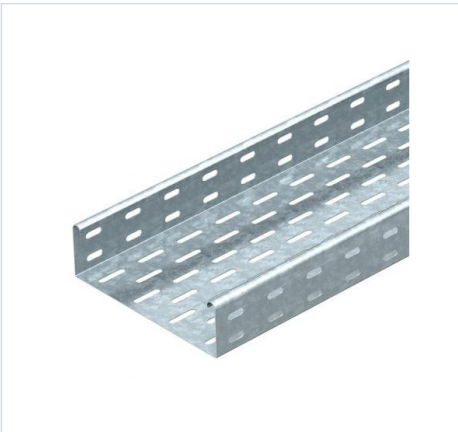

Manufacturer	OBO BETTERMANN
MPN / Reference	MKS 620 FT
Catalog number	6055575
Category	Cable tray/wide span cable tray
Minimum order	3 m.
Document ID	EO-93ED80B2DA
Generated	2026-08-02

Product Overview

CABLE TRAY MKS MKS 620 FT

MKS cable tray, perforated, 60x200x3000, hot-dip galvanised steel, DIN EN ISO 1461

MKS 620 FT 6055575 Cable tray MKS 60 FS

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN
--------------	---

Additional Product Information

Tested for installation above suspended fire protection ceilings (tray widths 100 - 400 mm, fire load 30 minutes, mounting work and parameters according to fire protection reports)

Type MKS 620 FT

Width mm 200

Plate thickness mm 1

Pack. m 3

Weight kg/100 m 261,000

Item No. 6055575

ETIM for 6055575 Cable tray, ladder and wire basket systems (EC000047)

Feature Name

Feature Value

Height (EF000040)

60 mm

Width (EF000008)
200 mm

Material thickness (EF000386)
1 mm

Length (EF001438)
3000 mm

Useful cross section (EF005140)
11800 mm²

With cover (EF007965)
No

Side perforation (EF001122)
Yes

Bottom perforation (EF004545)
Yes

NATO-mounting holes (EF006059)
No

Model (EF000010)
Coupler not included

Type of connector (EF000141)
Screwed

Suitable for circuit integrity (EF007806)
No

Material (EF002169)
Steel

Surface protection (EF000139)
Hot dip galvanized

Weight (EF000167)
2.63 kg/m

Load test type according to IEC 61537 (EF015362)
Type II

Possible support spacing (EF017261)
1.5 m

Safe working load according to IEC 61537 with support spacing 1.5 m (EF017264)
1500

Safe working load according to IEC 61537 with support spacing 2.0 m (EF017265)
1000

Safe working load according to IEC 61537 with support spacing 2.5 m (EF017266)
500

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / MKS 620 FT with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.