


INDUSTRIAL COMPONENT DATA

MSTBVA 2,5/ 8-G-5,08 AU 1746114 PHOENIX CONTACT

Feed-through header

Brand: PHOENIX CONTACT | Manufacturer Part Number: MSTBVA 2,5/ 8-G-5,08 AU

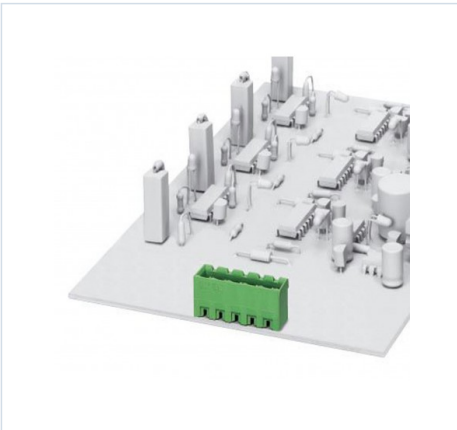

Manufacturer	PHOENIX CONTACT
MPN / Reference	MSTBVA 2,5/ 8-G-5,08 AU
Catalog number	1746114
Category	Printed circuit board connector
Minimum order	50 Pcs
Document ID	EO-9D84115A42
Generated	2026-08-04

Product Overview

Feed-through header

Printed circuit board base housing, nominal section: 2.5 mm², color: green, nominal current: 12 A, nominal voltage (III/2): 320 V, contact surface: Gold, contact type: Male, number of potentials: 8, number of rows: 1, number of poles: 8, number of connections: 8, article family: MSTBVA 2,5/.. -G, pitch: 5.08 mm, mounting: Wave soldering, pin arrangement: Linear pin arrangement, pin length [P]: 3.9 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5, Plug-in face orientation: Standard, locking: without, fixing type: without, packaging type: box-packed, Gold-plated contact surface / color: Green RAL 6021

PCB headers, nominal cross section: 2.5 mm², color: green, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Au, contact connection type: Pin, number of potentials: 8, number of rows: 1, number of positions: 8, number of connections: 8, product range: MSTBVA 2,5/..-G, pitch: 5.08 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.9 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Gold-plated contact surface / color: Green RAL 6021

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)
--------------	--

Additional Product Information

Technical dataProduct propertiesProduct type PCB headers

Product family MSTBVA 2,5/..-G

Product line COMBICON Connectors M

Number of positions 8
Pitch 5.08 mm
Number of connections 8
Number of rows 1
Number of potentials 8
Mounting flange without
Pin layout Linear pinning
Solder pins per potential 1
Data management status
Article revision 04
Electrical propertiesNominal current IN 12 A
Nominal voltage UN 320 V
Contact resistance 2.7 m?
Rated voltage (III/3) 320 V
Rated surge voltage (III/3) 4 kV
Rated voltage (III/2) 320 V
Rated surge voltage (III/2) 4 kV
Rated voltage (II/2) 630 V
Rated surge voltage (II/2) 4 kV
MountingMounting type Wave soldering
Pin layout Linear pinning
Material specificationsMaterial data - contact
Note WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material Cu alloy
Surface characteristics partially gold-plated
Metal surface contact area (top layer) Gold (0.8 - 1.4 μm Au)
Metal surface contact area (middle layer) Nickel (2 - 3 μm Ni)
Metal surface soldering area (top layer) Tin (5 - 7 μm Sn)
Metal surface soldering area (middle layer) Nickel (1 - 3 μm Ni)
Material data - housing
Color (Housing) green (6021)
Insulating material PA
Insulating material group I
CTI according to IEC 60112 600
Flammability rating according to UL 94 V0
Glow wire flammability index GWFI according to EN 60695-2-12 850
Glow wire ignition temperature GWIT according to EN 60695-2-13 775
Temperature for the ball pressure test according to....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / MSTBVA 2,5/ 8-G-5,08 AU with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.